

AC Switches

Commercial Grade, Back and Side Wired

15 Amp 120-277V AC; 20 Amp 120-277V AC

Features - Specifications

- AC – general use snap switches are designed for controlling as permitted by the NEC, resistive, inductive, tungsten-filament, fluorescent and motor loads for AC branch lighting and appliance circuits
- Back wiring: clamp-type terminals accept up to #10 wire
- Terminal screws: combination Phillips/slotted/Robertson binding head, accepts up to #10 wire
- Approved for CU wire only
- Silver cadmium oxide contacts
- Rivetless one-piece copper alloy contact arm for excellent conductivity
- Grounding connections – green, combination Phillips/ slotted/Robertson hex head screw and automatic ground clip
- Thread cleaning captive combination Phillips/slotted/Robertson mounting screws
- Nylon toggle
- Break-off plaster ears
- UL Listed File #E1464 – Guide #WMUZ
- Verified under Fed Spec. #W-S 896 (1P-2P-3W)
- CSA Certified File #LR375 – Guide #380-W-19.7
- Complies with UL 20 and NEMA Standard WD-1
- NOM



CSB115BI



CSB315BI




CSB320BWC Side

CATALOG NUMBER		DESCRIPTION
15A 120-277V AC	20A 120-277V AC	
CSB115B CSB115BC CSB115BG CSB115BGY CSB115BGYC CSB115BI CSB115BIC CSB115BW CSB115BWC	CSB120B CSB120BC CSB120BG CSB120BGY CSB120BGYC CSB120BI CSB120BIC CSB120BW CSB120BWC	Single-pole, brown handle Single-pole, brown handle w/Robertson head screws Single-pole, gray handle Single-pole, gray handle w/Robertson head screws Single-pole, ivory handle Single-pole, ivory handle w/Robertson head screws Single-pole, white handle Single-pole, white handle w/Robertson head screws
— — — — — — —	CSB220B CSB220BC CSB220BG CSB220BGY CSB220BGYC CSB220BI CSB220BIC CSB220BW CSB220BWC	Double-pole, brown handle Double pole, brown handle w/Robertson head screws Double-pole, gray handle Double pole, gray handle w/Robertson head screws Double-pole, ivory handle Double-pole, ivory handle w/Robertson head screws Double-pole, white handle Double pole, white handle w/Robertson head screws
CSB315B — CSB315BG — CSB315BI — CSB315BW —	CSB320B CSB320BC CSB320BG CSB320BGY CSB320BGYC CSB320BI CSB320BIC CSB320BW CSB320BWC	3-way, brown handle 3-way, brown handle w/Robertson head screws 3-way, gray handle 3-way, gray handle w/Robertson head screws 3-way, ivory handle 3-way, ivory handle w/Robertson head screws 3-way, white handle 3-way, white handle w/Robertson head screws
— — — — — — — —	CSB420B CSB420BC CSB420BG CSB420BGY CSB420BGYC CSB420BI CSB420BIC CSB420BW CSB420BWC	4-way, brown handle 4-way, brown handle w/Robertson head screws 4-way, gray handle 4-way, gray handle w/Robertson head screws 4-way, ivory handle 4-way, ivory handle w/Robertson head screws 4-way, white handle 4-way, white handle w/Robertson head screws

HORSEPOWER RATED

RATING	120V	240V	MAX
15 AMP	1/2 HP	2 HP	12 AMP
20 AMP	1 HP	2 HP	16 AMP

PRODUCT DIMENSIONS – () Indicates mm dimensions

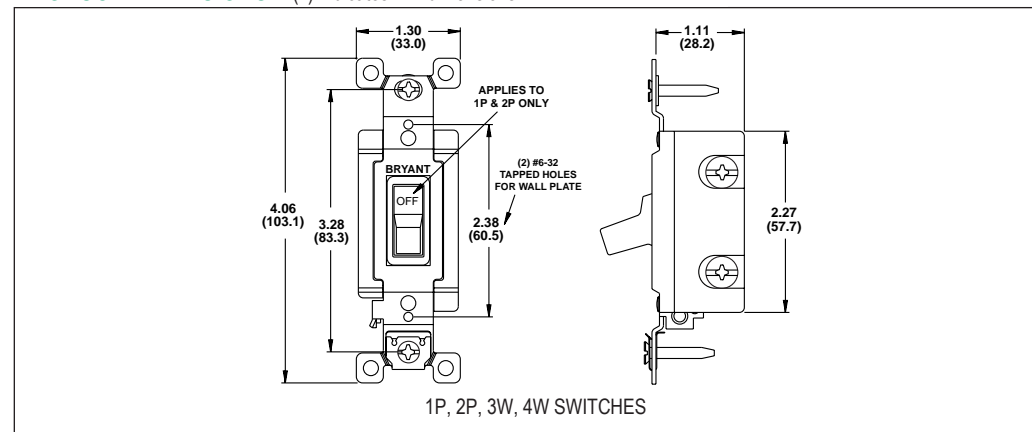

Specifications are subject to change without notice.