
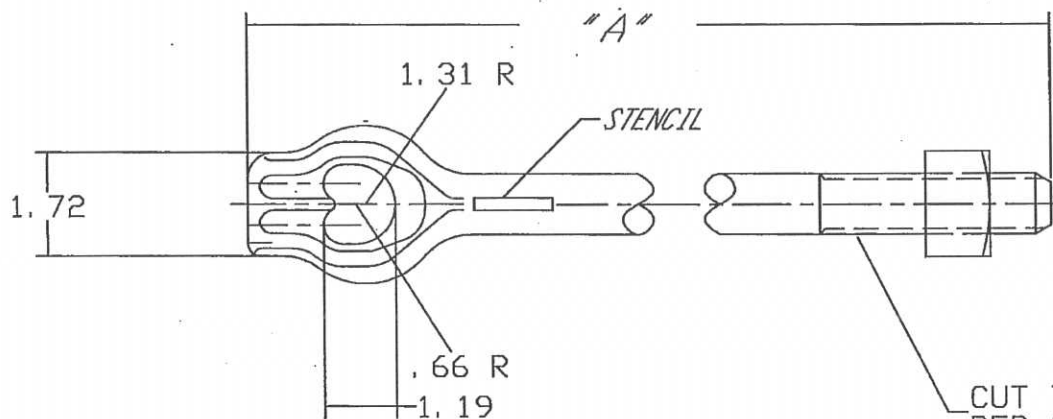


-NOTES-

1. H. D. GALVANIZE PER ASTM SPEC. A153 (LATEST REV.).
2. .31 R GROOVES MUST BE TRIMMED SMOOTH.
3. MIN. STENGTH 36,000 LBS PER ANSI C135.2 (LATEST REVISION).

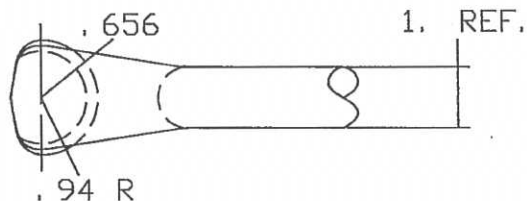

CUT THREADS, 3-1/2" MIN LG. PER CD46094 FOR 1" ANCHOR ROD

CAT NO.	DESCRIPTION	"A"	STENCIL
C5368	THREADED TWINEYE ROD	8' -0"	C-1-8
C5369	THREADED TWINEYE ROD	9' -0"	C-1-9
C5370	THREADED TWINEYE ROD	10' -0"	C-1-10

CHANCE TOLERANCE CHART		 HUBBELL POWER SYSTEMS <small>POWER SYSTEMS, INC.</small>	
<small>CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>			
TITLE		TWINEYE THREADED ROD	
SIZE	DWG NO.	CAT / PART / ASSY NO.	REV
B	SAC5368	SEE CHART	-
DO NOT SCALE THIS DRAWING	DRN BY DVH	DATE 2-13-09	SHEET 1 OF 1